



PRODUCT DATA SHEET


Coaxial Cable Connect: DIN-F1/2S-A

Description

DIN(F) Connector for 1/2" Superflex" Cable

Suitable standard

IEC 60169-4

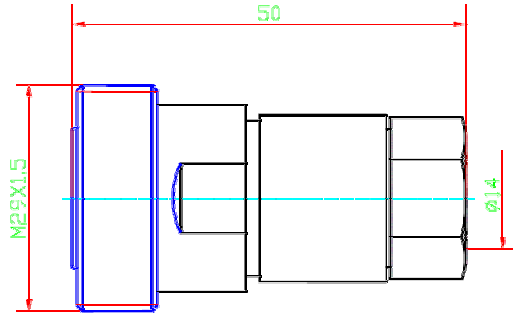

MATERIALS & PLATING

	Description	Material	Surface Plating	Remark
1	Shell/Body	BRASS	Nickel or Tri-Allory	
2	Center Conductor	Phosphor bronze	Gold or Silver	
3	Insulator	PTFE		

ELECTRICAL CHARACTERISTICS

	Item	Technical Data
1	Impedance	50Ω
2	Frequency range max	DC-3 GHz
3	Contact Resistance	Center conductor ≤ 0.4mΩ, Outer conductor ≤ 1mΩ
4	Insulation Resistance	≥ 10000MΩ
5	VSWR	DC~3GHz<1.06
6	IMP3	≤ -155dBc
7	Dielectric Withstanding Voltage	4000V RMS, 50Hz,at sea level

MECHANICAL CHARACTERISTICS

1	Durability	≥ 500 cycles
---	------------	--------------

ENVIRONMENTAL CHARACTERISTICS

1	Temperature range	Cable: - 40°C to +100 °C
---	-------------------	--------------------------