



PRODUCT DATA SHEET


Coaxial Cable Connector: DIN-MLMR400

Description

DIN(M) Connector For LMR400 Cable

Suitable standard

IEC 61169-4

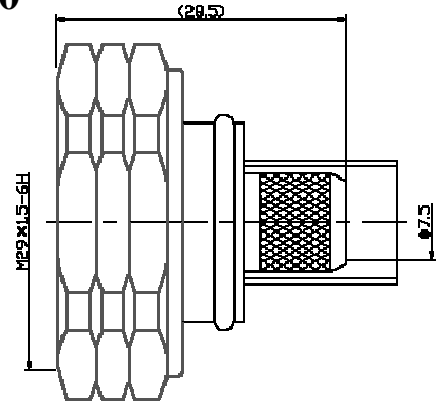

MATERIALS & PLATING

	Description	Material	Surface Plating	Remark
1	Shell/Body	BRASS	Nickel or Tri Alloy	
2	Centre Conductor	BRASS	Gold or Silver	
3	Insulator	PTFE		

ELECTRICAL CHARACTERISTICS

	Item	Technical Data
1	Impedance	50Ω
2	Frequency range max	DC-3GHz
3	Dielectric Withstanding Voltage	2500V (RMS), 50Hz, at sea level
4	Contact Resistance	Center conductor $\leq 0.4m\Omega$, Outer conductor $\leq 1m\Omega$
5	Insulation Resistance	$\geq 10000M\Omega$
6	VSWR	DC~3GHz ≤ 1.15

MECHANICAL CHARACTERISTICS

1	Durability	≥ 500 cycles
---	------------	-------------------

ENVIRONMENTAL CHARACTERISTICS

1	Temperature range	Cable: - 40°C to +85 °C
---	-------------------	-------------------------