



# PRODUCT DATA SHEET


## Coaxial Cable Connector: N/N-50MFRA

### Description

N(M) to N(F) Right Angle Adaptor

### Suitable standard

IEC 60169-16

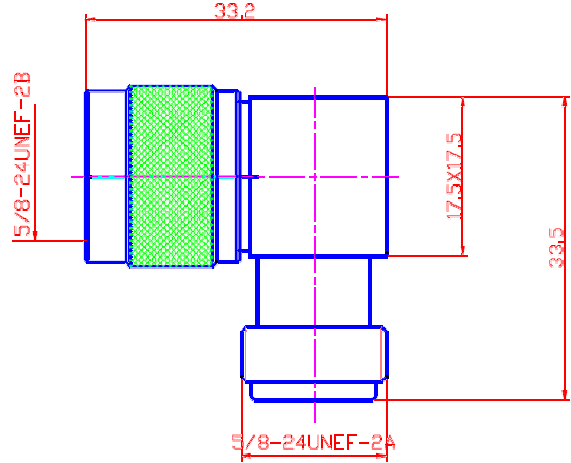

### MATERIALS & PLATING

	Description	Material	Surface Plating	Remark
1	Shell/Body	BRASS	Nickel	
2	Centre Conductor	Phosphor bronze	Gold or Silver	
3	Coupling nut	BRASS	Nickel or Tri Allory	
4	Insulator	PTFE		
5	O-ring	Silicon Rubber		

### ELECTRICAL CHARACTERISTICS

	Item	Technical Data
1	Impedance	50Ω
2	Frequency range max	DC-3GHz
3	Dielectric Withstanding Voltage	≥ 2500V (RMS), 50MHz, at sea level
4	Insulation Resistance	≥ 5000MΩ
5	VSWR	DC~3GHz <1.1

### MECHANICAL CHARACTERISTICS

1	Durability	≥ 500 cycles
---	------------	--------------

### ENVIRONMENTAL CHARACTERISTICS

1	Temperature range	Cable: - 40°C to +85 °C
---	-------------------	-------------------------